


# Forage Harvester Kuilverstroper



## New Holland 790 Trailed Forage Harvester New Holland 790 Sleeptipe Kuilverstroper

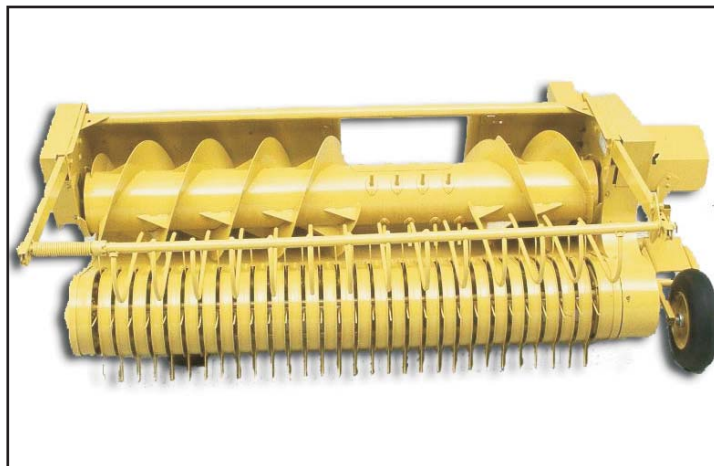

**Modern • Dynamic • Innovative  
Modern • Dinamies • Innoverend**

**SPECIFICATIONS NEW HOLLAND PULL-TYPE FORAGE HARVESTER**  
**SPESIFIKASIES NEW HOLLAND SLEEP-TIPE KUILVOERSTROPER**

SPECIFICATIONS		790	SPESIFIKASIES
MODEL			MODEL
<b>BASE UNIT</b>			<b>BASIESE EENHEID</b>
Cutter unit			Kerfeenheid
Width (mm)	490,5		Wydte (mm)
Diameter (mm)	476		Deursnee (mm)
Intake opening (mm)	482 X 117		Inneemopening (mm)
Number of knives	12		Aantal kerfmesse
Cutterhead speed (r/min)	850		Kerfdrom spoed (r/min)
Shearbar	Quick adjustable, reversable and hard-faced / Kits verstelbaar, omdraaibaar en verhard		Stilstaande mes
Blower speed (r/min)	1000		Waaierspoed (r/min)
Built in knife sharpener	Manual/Meganies		Ingeboude slypsteen
Metal detector	"Metalert III"		Metaal verklikker
<b>GENERAL</b>			<b>ALGEMEEN</b>
Hydraulic height control	Standard/Standaard		Hidrouliese hoogtebeheer
Trailer hitch	Standard/Standaard		Sleepwa-haak
Electric spout controls	Standard/Standaard		Elektriese blaasgeut kontroles
Hydraulic tongue control	Standard/Standaard		Hidrouliese trekstang beheer
<b>DIMENSIONS AND MASS</b>			<b>AFMETINGS EN MASSA</b>
Length (m)	4,98		Lengte (m)
Width (m)	2,79		Wydte (m)
Height (m)	3,2 (Standard spout/Standaard geut)		Hoogte (m)
Mass (kg)	1411		Massa (kg)
Wheels			Wiele
Tyre size	11,00L X 14		Bandgrootte
<b>RECOMMENDED TRACTOR KW</b>			<b>AANBEVOLE TREKKER KW</b>
Maximum kW	112		Maksimum kW
Minimum PTO kW	56		Minimum KA kW
<b>ROW-CROP CUTTERHEADS</b>			<b>RYGEWAS SNYKOPPE</b>
Number of rows	2 **		Aantal rye
Row Widths (mm)	700 tot/to 1000		Rywydtes (mm)
Protection	Shearbolt/Breekbout		Beveiliging
Cutting knives	Rotary/Roterend		Snymesse
Width (m)	1,626 to/tot 1,981		Wydte (m)
Length (m)	1,905		Lengte (m)
Height (m)	0,857		Hoogte (m)
Mass (kg)	392		Massa (kg)
** Can be mounted on model 900			** Kan op model 900 monteer
<b>WINDROW PICK-UPS</b>			<b>OPTELKOPPE</b>
Pick-up width (m)	1,790		Optelwydte (m)
Number of pick-up tines	84		Aantal opteltande
Auger diameter (mm)	457		Awegaar deursnee (mm)
Pick-up drive	V-belt/V-band		Opteller aandrywing
Auger drive	Chain/Ketting		Awegaar aandrywing
Protection	Slip clutch/Glipkoppelaar		Beveiliging
Width (m)	2,450		Wydte (m)
Mass (kg)	314		Massa (kg)

PRINT 2000 ☎ (011) 893-3255